TEX-COMP™

USERS SUPPLY DIVISION

Proudly Introduces The
SIGNALMAN™ MARK III
TI 99/4A COMPATIBLE

MODEM

Finally, a low cost, direct connect, high quality and super reliable TI-99/4 and 99/4A compatible modem that comes complete and ready to use — just plug it into a TI RS/232 interface or expansion card.

Mfg. Suggested List Price $139.00
6½% SALES TAX IN CALIF.

TEX-COMP PRICE
$94.95
Including shipping & insurance

TEX-NET™
Double Special. Buy TI Terminal Emulator II with your modem for only **$34.95.**

ACCESSORIES:
9V-DC Power Supply — **$10.95 p.p.**

Meet the direct-connect SIGNALMAN MARK III designed for use with your TI-99/4A Accessories Interface . . . the smallest, lightest, most compact modem available today. Its long life 9-volt internal battery and exclusive audible Carrier Detect Signal allow you to install the SIGNALMAN anywhere . . . out of the way, and out of sight. Now, there's no need for messy cables, and no need to look at a LED to verify carrier.

Your SIGNALMAN transmits both voice and data over all common telephone lines, and is fully compatible with Bell 103 modems — putting your computer in instant communications with thousands of other computers. And when you're in the data position, your SIGNALMAN automatically changes from ORIGINATE to ANSWER and back again as the need arises — ending all that confusion.

Anchor Automation has taken the fuss out of communications. For business or fun, SIGNALMAN is the ideal modem.

SPECIFICATIONS

Data Format	Serial, binary, asynchronous	
Operate Mode	Manual dial, Automatic ANSW/ORIG selection	
Data Rate	0 to 300 bps, full duplex	
Modulation	Frequency shift-keyed (FSK)	
Line Interface	Direct-connect	
Data Interface	TI RS-232C compatible, built-in cable to computer	
Transmit Frequency	**ORIG**	**ANSW**
MARK	1270 Hz	2225 Hz
SPACE	1070 Hz	2025 Hz
Transmit Frequency Accuracy	± 0.01%	
Transmit Level	−12 dBm typical	
Receive Frequency	**ORIG**	**ANSW**
MARK	2225 Hz	1270 Hz
SPACE	2025 Hz	1070 Hz
Receive Frequency Tolerance	± 0.5%	
Carrier Detect Threshold	−44 dBm typical	
Carrier Detect Indicator	Audible tone	
Power Requirement	Internal 9V transistor battery* or 110 VAC through adapter*	
Size	8¼" x 4⅜" x 1⅜"	

*Not included

This unit interfaces between the receiver and handpiece of standard Bell modular phones. Phones with dials in the handpiece or without a modular cord between the receiver and handpiece or without a modular cord between the handpiece and receiver, will require an optional adapter.
Comes complete with cable and cord. This is a unit specially designed for the TI-99/4A and should not be confused with other Anchor/Signalman models that sell for less and/or are not compatible with the TI-99/4A.

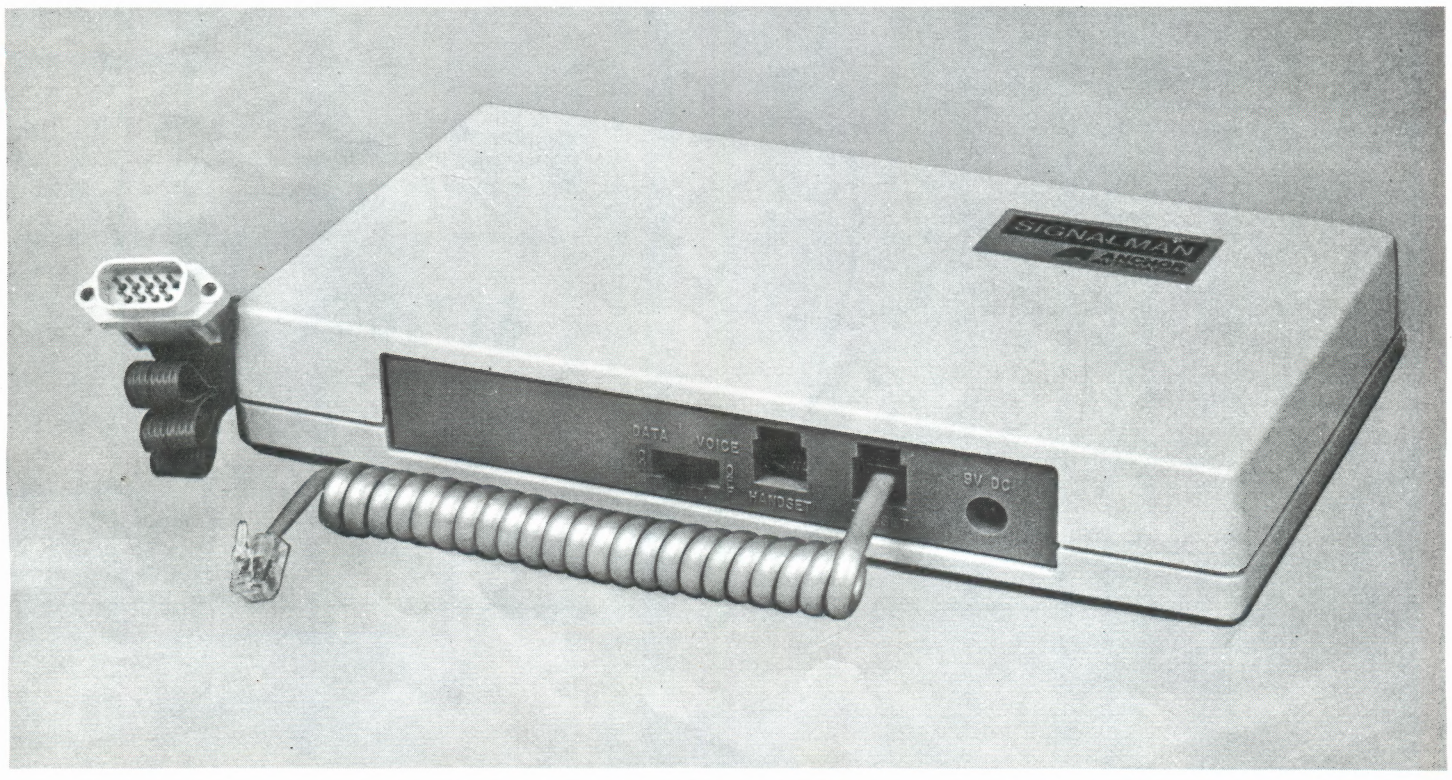

Send Check or Money Order to: **TEX-COMP • P.O.BOX 33084 • GRANADA HILLS, CA. 91344 • (213) 873-4750 TI0166**

©1982 CALVERT ENGR. INC.

TEX-SOFT ™ PRESENTS

Beanstalk™ Adventure

Now for the TI-99/4 and TI-99/4A an adventure game based on the classic fairy tale Jack and the Beanstalk where you become the lead character and your moves control your destiny and even may change the course of history.

(The giant might get you)

This is one of a series of quality programs being written or reprogrammed for the 99/4 and 99/4A computers by TEX-SOFT, the TI 99/4A software affiliate of TEX-COMP Users Supply Division.

Send check or Money Order To:
TEX-SOFT Software
P.O. Box 33084
Granada Hills, CA 91344

Minimum Configuration Required.

1. 99/4 or 99/4A console.
2. 1 Disk Drive and Controller. ★
3. 32 K Memory Expansion.
4. Extended Basic Module.

★ Not available on cassette.

$17.95

Including shipping & handling

Reprogrammed for the 99/4 by George F. Steffen
©1982 Calvert Engineering, Inc. TEX-SOFT Division.